

Project title: Development of a mechanical-pneumatic stretching and catching system for air-jet weaving machines - HybridCatch

Partner: none

Term: 1/2018 – 12/2019


Univ.-Prof.
Prof. h.c. (Moscow State Univ.)
Dr.-Ing. Dipl.-Wirt. Ing.
Thomas Gries
 Institutsleiter

Andreas Münkel
 WMA

01.01.2018

Funding agencies: IGF-research project 19738 N

Mission Statement

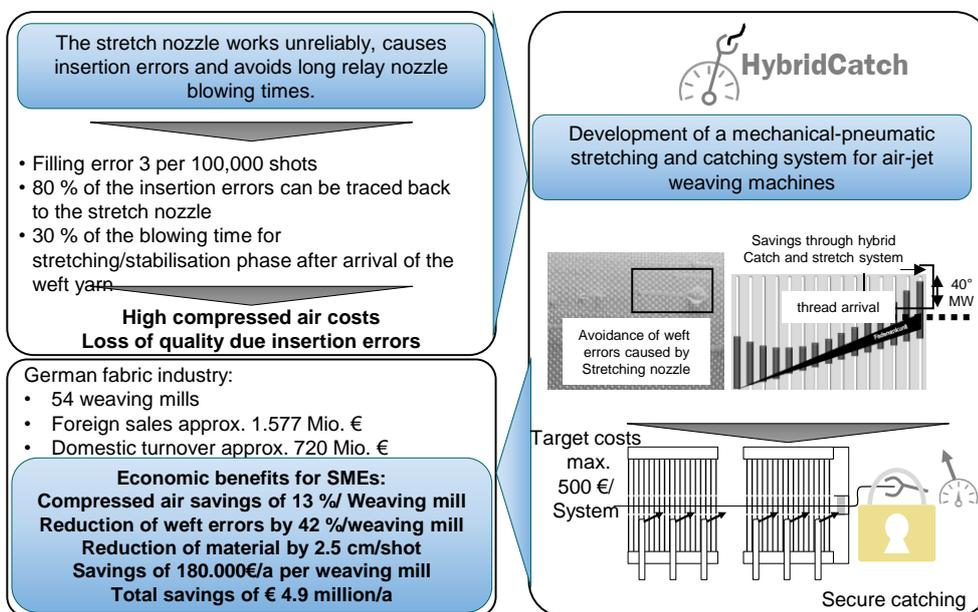

With around 1,200 companies, the German textile and clothing industry is one of the largest branches of industry in Germany. One of the main characteristics of this branch of industry is the high number of small and medium-sized enterprises (75%). In 2014, German weaving mills alone achieved a turnover of € 1,577 million. There are 61 weaving companies in Germany with a total of approx. 8,600 employees. The export quota of the produced fabrics (e.g. for the automotive industry) amounts to approx. 54 % with a foreign turnover of approx. 570 million €. Approximately 60 % of the companies (in about 40 companies) are located in the field of technical textiles, which produce high-quality goods such as airbag fabrics.

The majority of technical fabrics are produced using the air-weaving process, which is currently the most productive weaving process. According to ITMF, about 45 % of the weaving machines sold in Western Europe are air

jet machines. The motivation for the research proposal is based on a recognised challenge from industry. During weft insertion, the stretching nozzle on air-jet weaving machines does not reliably capture and stretch the weft thread. This misconduct leads to fabric defects. 60 - 80 % of machine downtimes during the processing of staple fibres and up to 90 % of weaving faults in filaments are due to weft faults. These faults are particularly problematic for technical products such as airbag fabrics. It is also possible that weft defects can only be detected after layering. This often occurs, for example, with coating substrates for membranes. In order to remedy such shooting errors, a longer blowing time of the relay nozzles, which is not necessary for the process, is currently being accepted. Furthermore, the length of the selvage is increased so that the stretching nozzle can reliably grip the thread.

In order to avoid weft errors, a new type of catching system is being developed within the scope of the project, which reliably tightens the weft yarn and does not require any additional stabilisation. A hybrid catching and stretching system for weft threads is planned, consisting of a pneumatic and a mechanical component. Air-jet weaving machines can be retrofitted with this system. With the help of the system, weft errors caused by the stretching nozzle can be reduced by 42 % and the stabilization time for the weft thread can be reduced so that approx. 13 % compressed air can be saved. At the end of the project, an acceptable defect size for the industry of approx. two weft defects per 100.000 weft entries can be achieved. Furthermore, the use of the new system will reduce the edge waste by 2.5 cm/weft insertion.

Acknowledgements:

The IGF project AiF no. 19738 N of the Forschungsvereinigung Forschungskuratorium Textil e.V., Reinhardtstraße 12-14, 10117 Berlin is funded by the AiF within the framework of the programme for the promotion of joint industrial research and development (IGF) of the Federal Ministry of Economics and Technology on the basis of a resolution of the German Bundestag.

Contact:

Andreas Münkel, M.Sc.

Institut für Textiltechnik der RWTH Aachen University

Otto-Blumenthal-Str. 1, D-52074 Aachen

Tel.: +49 (0)241 80 234 87

Fax: +49 (0)241 80 224 22

E-Mail: andreas.muenkel@ita.rwth-aachen.de